

## Dual Channel ESD Protection Device

UM1001 SOT23-6

### General Description

The UM1001 is a low pass filter array with integrated TVS diodes for ESD protection. It is designed to provide unidirectional filtering of EMI/ RFI signals and electrostatic discharge (ESD) protection in portable electronic equipment. This state-of-the art device utilizes solid-state silicon-avalanche technology for superior clamping performance and DC electrical characteristics. They have been optimized for use on a USB port in cellular phone and other portable electronics.

The UM1001 effectively replaces 10 discrete components in a small SOT23-6 package to provide ESD protection and EMI filtering. This small package will protect and filter up to two lines. This small outline makes the device especially well suited for portable applications.

The TVS diodes are unidirectional for supporting unipolar signals without distortion. The TVS diodes provide effective suppression of ESD voltages in excess of 15kV (air discharge) and 8kV (contact discharge) per IEC61000-4-2, level 4. The device has very low insertion loss in the pass band (to approximately 10MHz) and high attenuation at frequencies ranging from 800MHz to 3GHz. Each line features two stages of TVS diode protection. They feature large cross-sectional area junctions for conducting high transient currents. They offer desirable characteristics for board level protection including fast response time, low operating and clamping voltage, and no device degradation.


### Applications

- Web-Pads & Handhelds
- Notebook
- Portable Instrumentation
- Industrial Interface
- Treadmill


### Features

- Transient Protection for Data Lines to IEC 61000-4-2 (ESD)  $\pm 15\text{kV}$  (Air),  $\pm 8\text{kV}$  (Contact)
- Unidirectional EMI/RFI Filter with Integrated ESD Protection
- Protects Two I/O Lines
- Working Voltage: 5V
- Low Leakage Current
- Low Operating and Clamping Voltages
- Solid-State Silicon-Avalanche Technology

### Pin Configurations

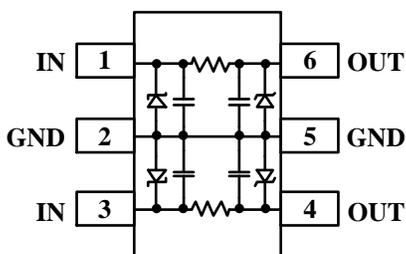

### Top View

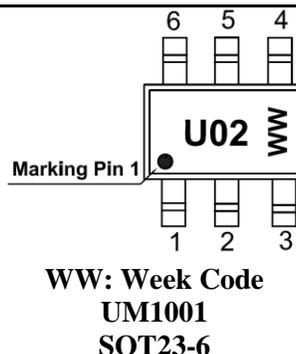

## Ordering Information

Part Number	Working Voltage	Packaging Type	Channel	Marking Code	Shipping Qty
UM1001	5.0V	SOT23-6	2	U02	3000pcs/7Inch Tape & Reel

## Absolute Maximum Ratings


Rating	Symbol	Value	Unit
Steady-State Power	$P_{SS}$	100	mW
Junction Temperature	$T_J$	-40 to +125	°C
Operating Temperature	$T_{OP}$	-40 to +85	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

## Electrical Characteristics (T=25 °C)


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Stand-Off Voltage	$V_{RWM}$				5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_T=1mA$	6			V
Reverse Leakage Current	$I_R$	$V_{RWM}=5V, T=25\text{ °C}$			5	μA
Series Resistance	R	Each Line		10		Ω
Total Capacitance	$C_{TOT}$	Any I/O to GND $V_R=0V, f=1MHz$			20	pF

## Typical Operating Characteristics


### Typical Insertion Loss

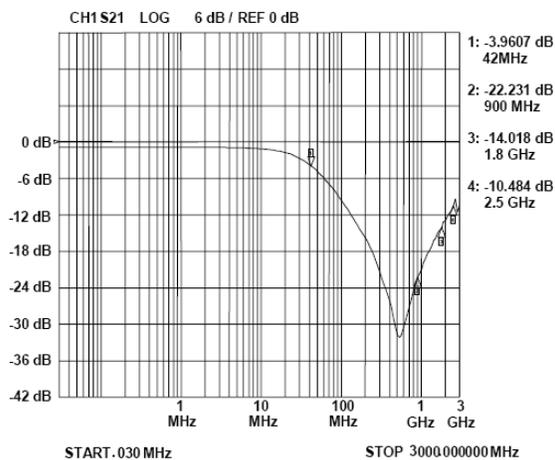


### Analog Crosstalk

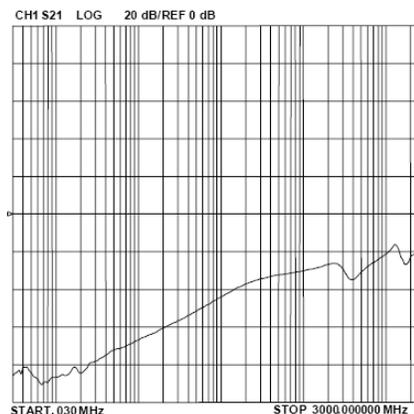


### Forward Voltage vs. Peaking Pulse Current

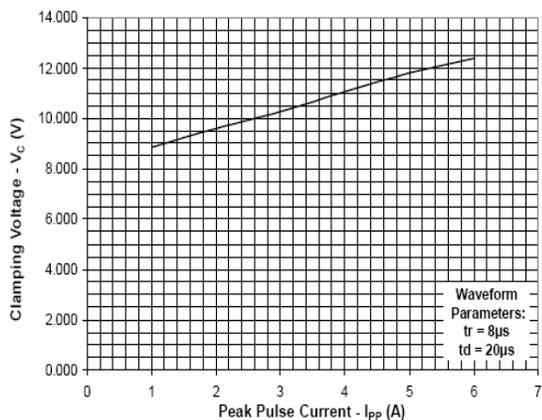


### Junction Capacitance vs. Reverse Voltage

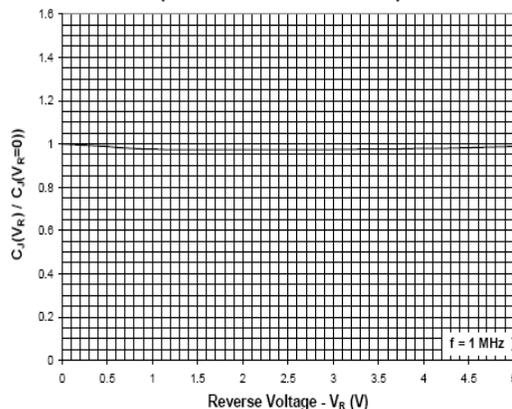

### ESD Clamping (8kV Contact)

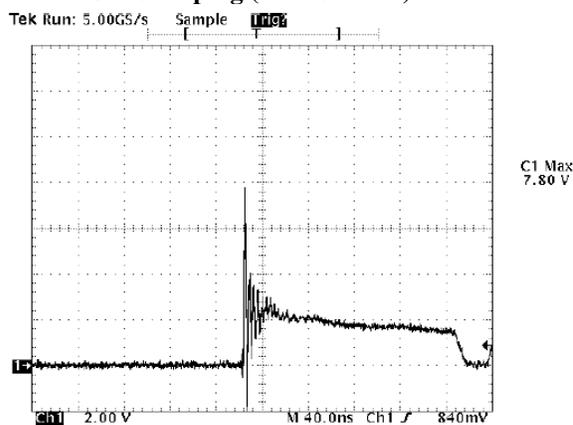

### ESD Clamping (15kV Air)

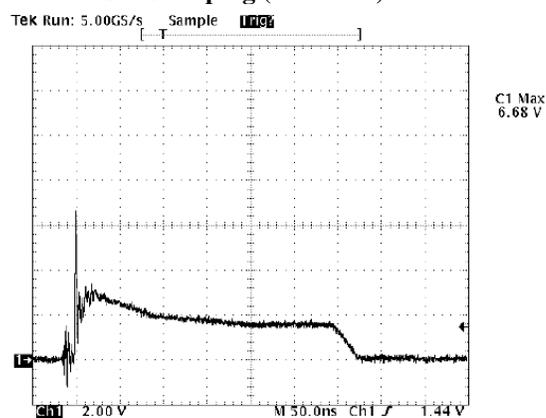

## Application Information

### Device Connection for Protection of Quad Data Lines


The UM1001 provides EMI filtering and ESD protection in a small SOT23-6 package for dual line data port applications. The layout of the device is designed such that the data lines can be routed through the device. The first line pair enters at pin 1 and exits at pin 6. The second line pair enters at pin 3 and exits at pin 4. The device is symmetrical so the above connections may be reversed.

### Circuit Board Layout Recommendations for Suppression of ESD


Good circuit board layout is critical for the suppression of ESD induced transients. The following guidelines are recommended:

1. Place the TVS near the input terminals or connectors to restrict transient coupling.
2. Minimize the path length between the TVS and the protected line.
3. Minimize all conductive loops including power and ground loops.
4. The ESD transient return path to ground should be kept as short as possible.
5. Never run critical signals near board edges.
6. Use ground planes whenever possible.

### Layout Example

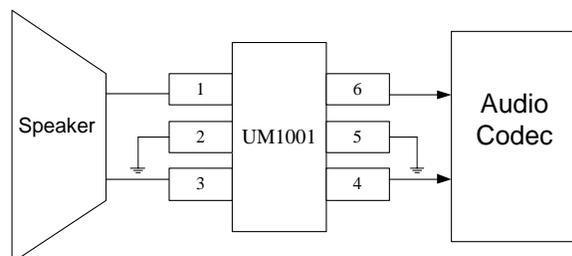

Pin	Identification
1	Line 1 In (From Speaker)
6	Line 1 Out (To Audio Circuit)
3	Line 2 In (From Speaker)
4	Line 2 Out (To Audio Circuit)
2, 5	Ground

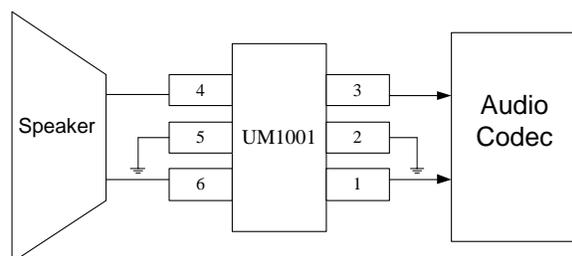


Pin	Identification
6	Line 1 In (From Speaker)
1	Line 1 Out (To Audio Circuit)
4	Line 2 In (From Speaker)
3	Line 2 Out (To Audio Circuit)
2, 5	Ground


## Package Information

### UM1001 SOT23-6


#### Outline Drawing

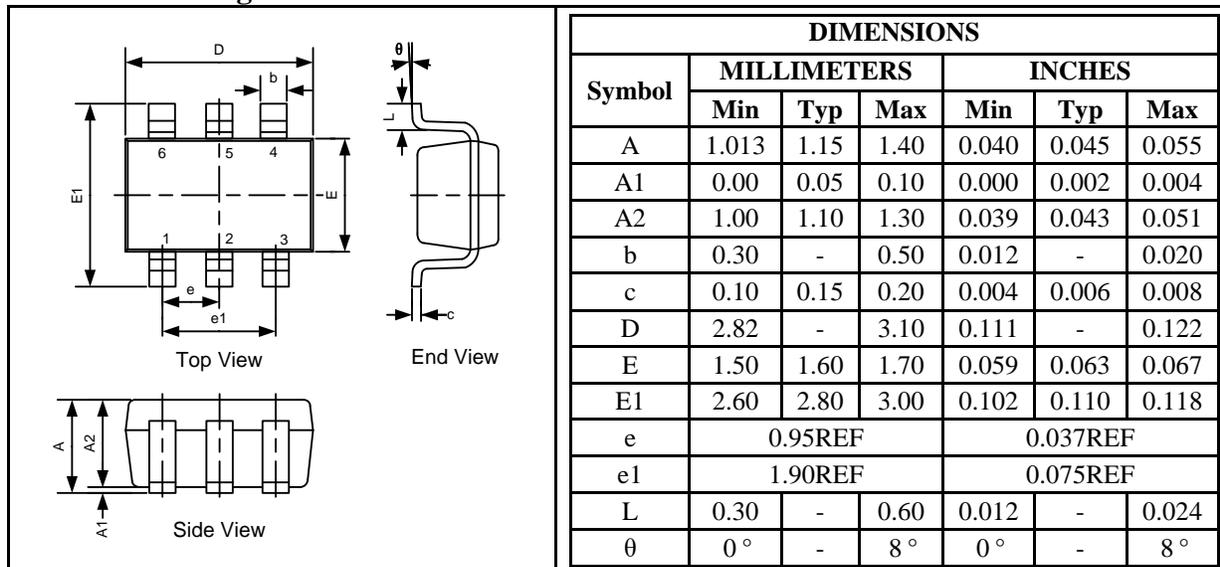


#### Land Pattern

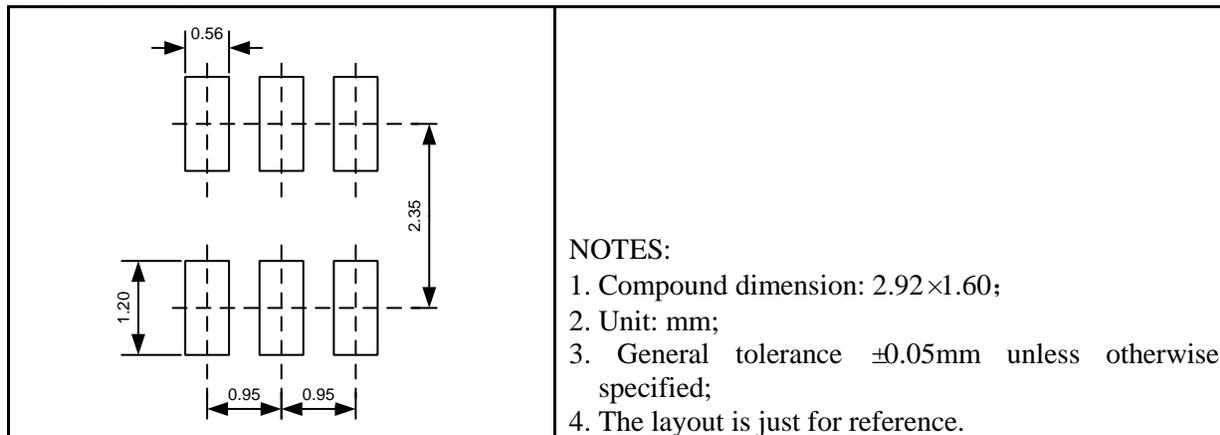

#### Tape and Reel Orientation

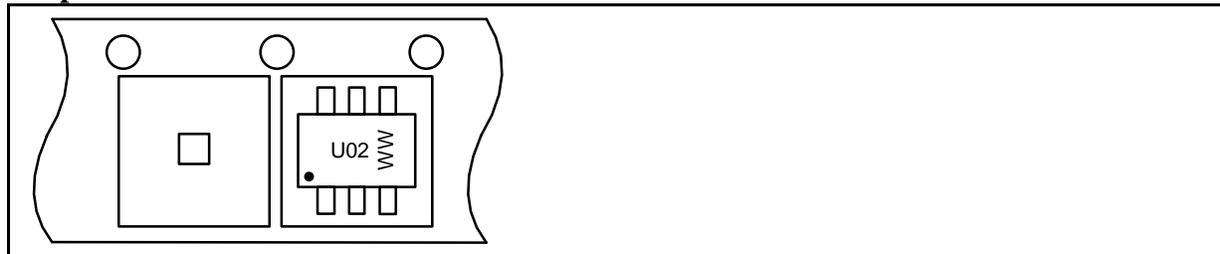

## Packing Information

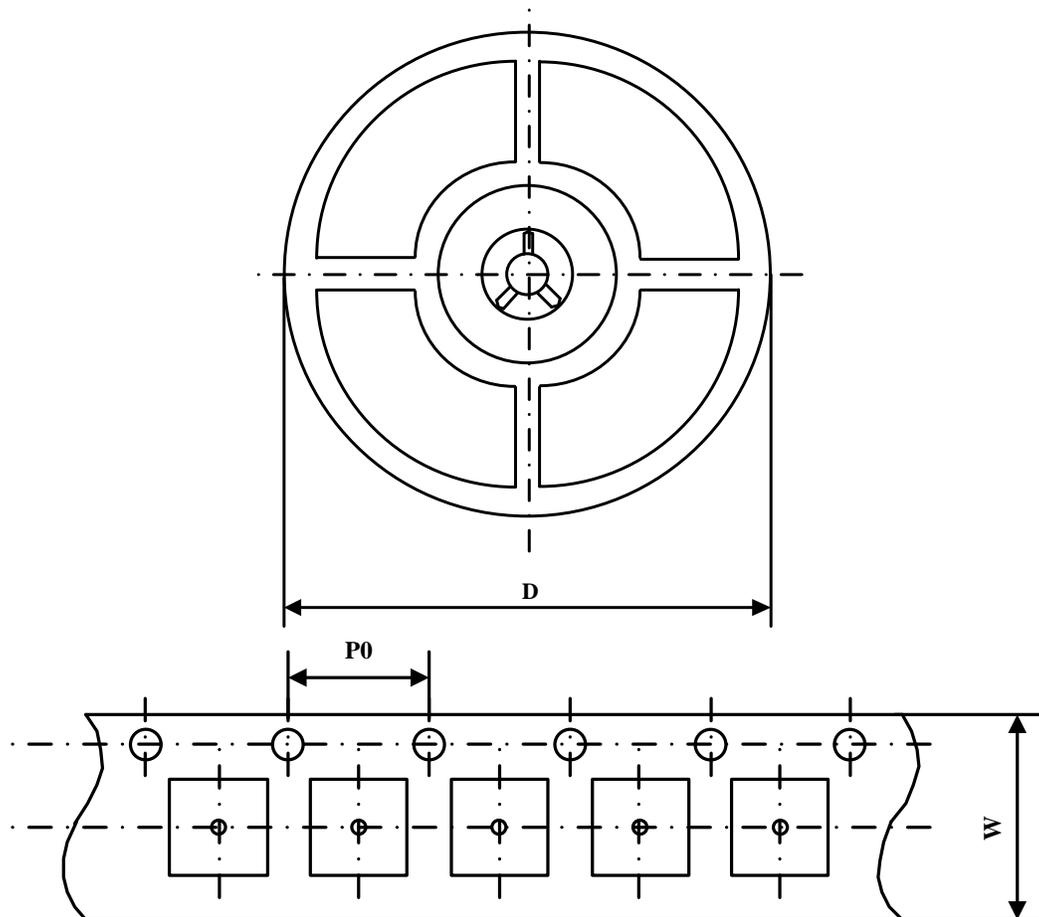

Part Number	Package Type	Carrier Width(W)	Pitch(P0)	Reel Size(D)
UM1001	SOT23-6	8 mm	4 mm	180 mm

---

## **GREEN COMPLIANCE**

Union Semiconductor is committed to environmental excellence in all aspects of its operations including meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Union components are compliant with the RoHS directive, which helps to support customers in their compliance with environmental directives. For more green compliance information, please visit:

[http://www.union-ic.com/index.aspx?cat\\_code=RoHSDeclaration](http://www.union-ic.com/index.aspx?cat_code=RoHSDeclaration)

## **IMPORTANT NOTICE**

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.



Union Semiconductor, Inc

Add: Unit 606, No.570 Shengxia Road, Shanghai 201210

Tel: 021-51093966

Fax: 021-51026018

Website: [www.union-ic.com](http://www.union-ic.com)